


# BESTUNG CARBIDE INC.

---

## MACRO TUNGSTEN CARBIDE POWDER

**Size Available**  
**60 mesh—400 mesh**

**Appearance: Silver Gray Granule**  
**Grade:**

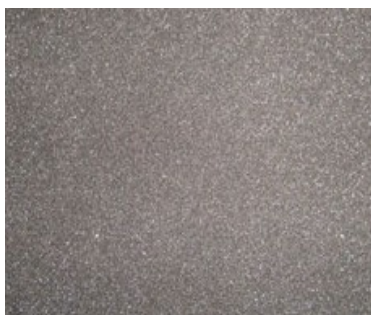

Grade	Range of mesh size	Particle size(mm)	Chemical composition(%)	
WC60-230F	-60+230	0.063-0.25	W	Balance
WC60-325F	-60+325	0.044-0.25	Total Carbon	6.0-6.20
WC200-400F	-200+400	0.038-0.075	Free Carbon	<0.1
			Trace elements (% max )	
			Co	<0.1
			Cr	<0.1
			Fe	<0.3
			Ni	<0.1
			Ti	<0.1
			V	<0.1

- 1). **Application: Thermal spray welding, coating , corrosion resistant materials, etc.**
- 2). **Size and chemical composition may vary as per customer's request.**

**Packing: Materials in plastic bag within steel drum, net each 50 kgs or 100 kgs**

**Quality: Assay results is available for each lot**

---

76 Industrial drive, North Tonawanda, NY 14120, U.S.A.

Tel: 716-743-2466, Fax: 716-743-2468

Email: [sales@bestungcarbideinc.com](mailto:sales@bestungcarbideinc.com)